


Sep.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case that the application demands a high level of reliability, such as automotive,  
 please contact a company representative for further information.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
△					△					

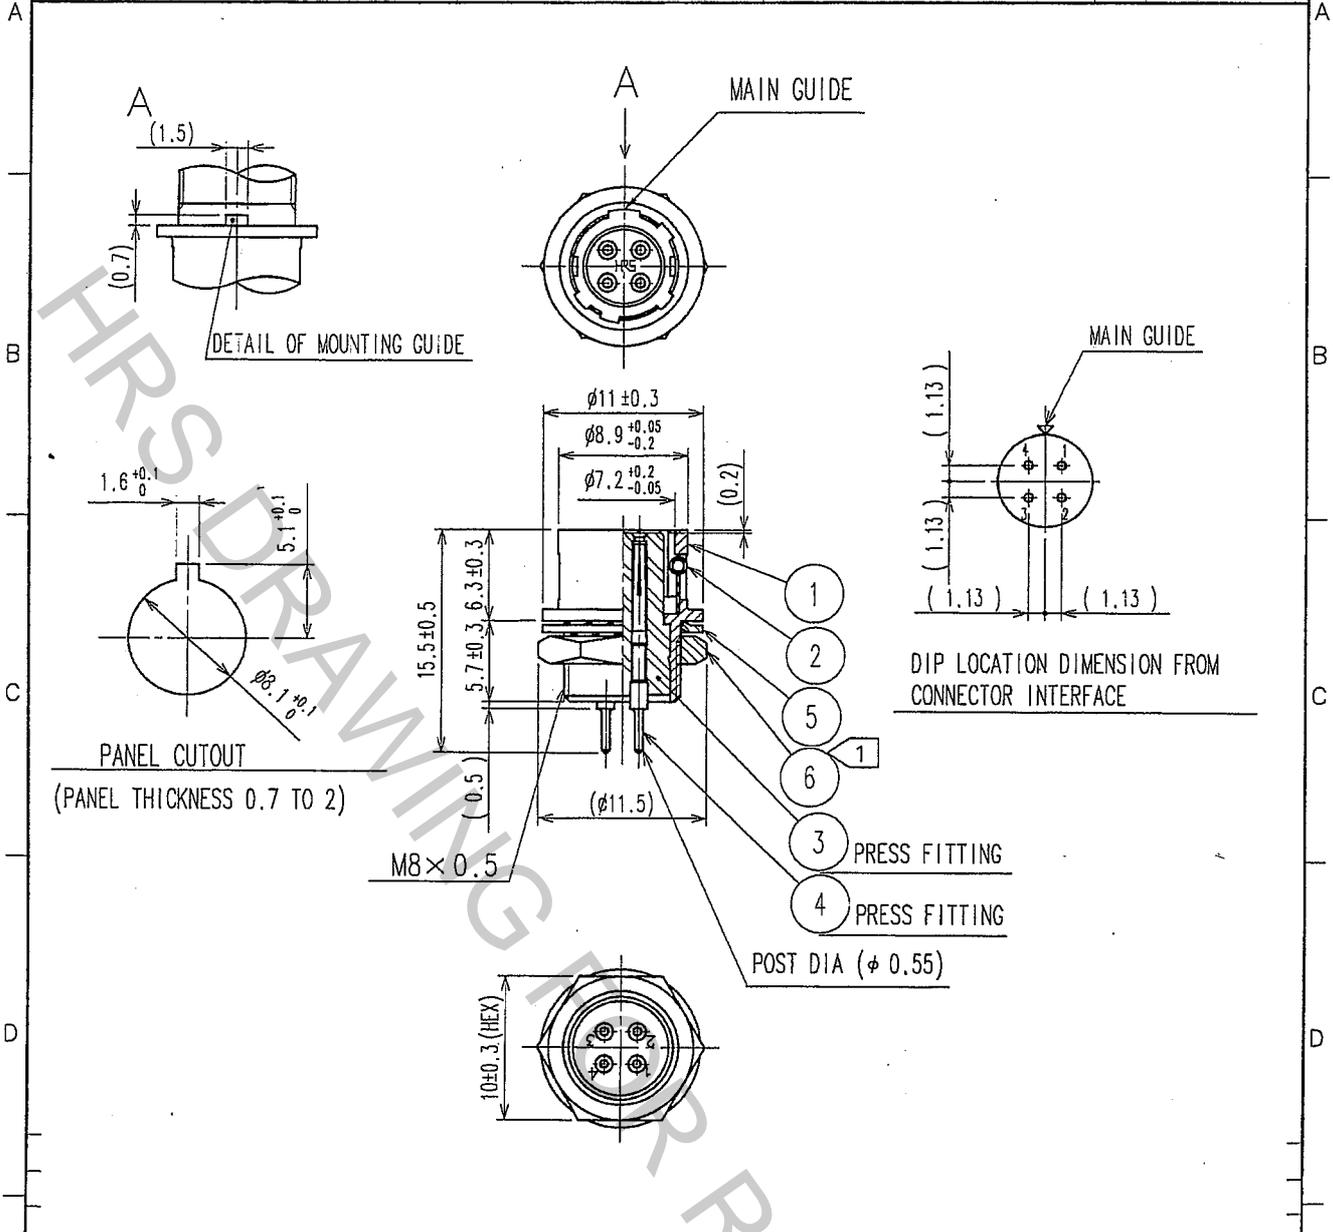

NOTE: ① THE RECOMMENDED TIGHTEN TORQUE OF REF.NO.⑥: 1.5N·m.  
 ADHESIVE LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS  
 RECOMMENDED TO PREVENT REF.NO.⑥ FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-1	6	BRASS	NICKEL PLATED
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATED
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BERYLLIUM COPPER	OVERPLATING : GOLD 0.2μm min UNDERPLATING : NICKEL 2.0μm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	TSUZUKI	Y. Yamada	P. Gawa	M. Sato	
	06-07-22	06-07-22	06-07-22	06-07-22	

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC4-022725-73 <b>HRS</b> HIROSE ELECTRIC CO., LTD.	PART NO. HR10-7R-4SA(73) CODE NO. CL110-0059-9-73	1/1
-----------------------------------	---	--	-----

TO  
 R