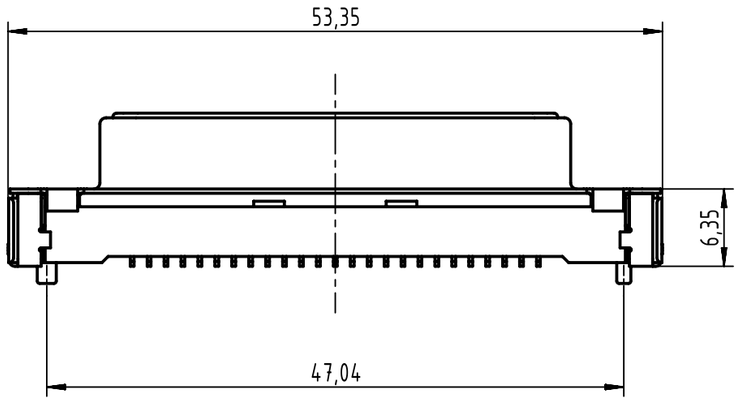

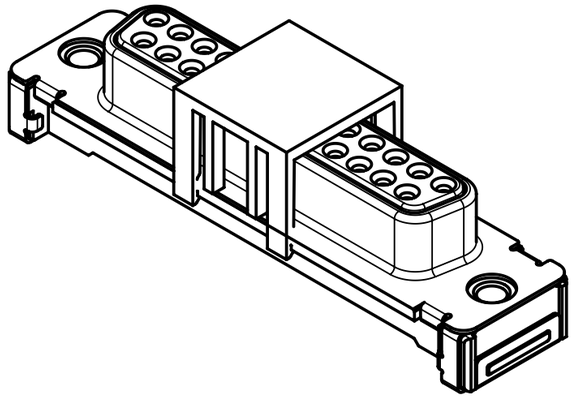

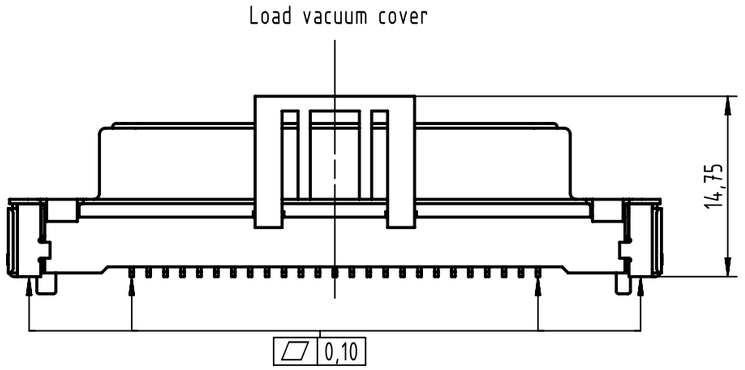

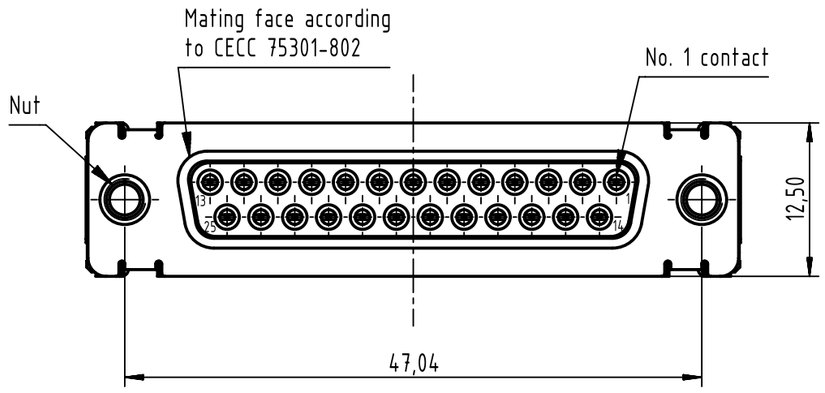



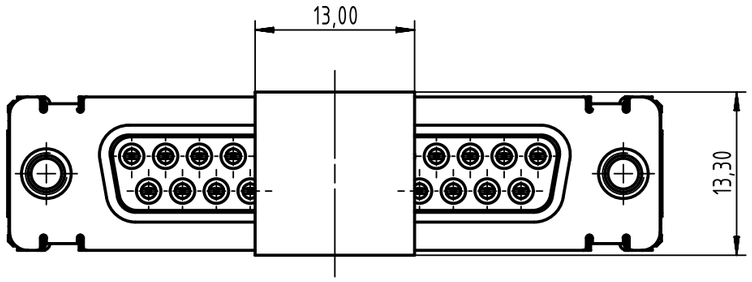

PCB layout, component side

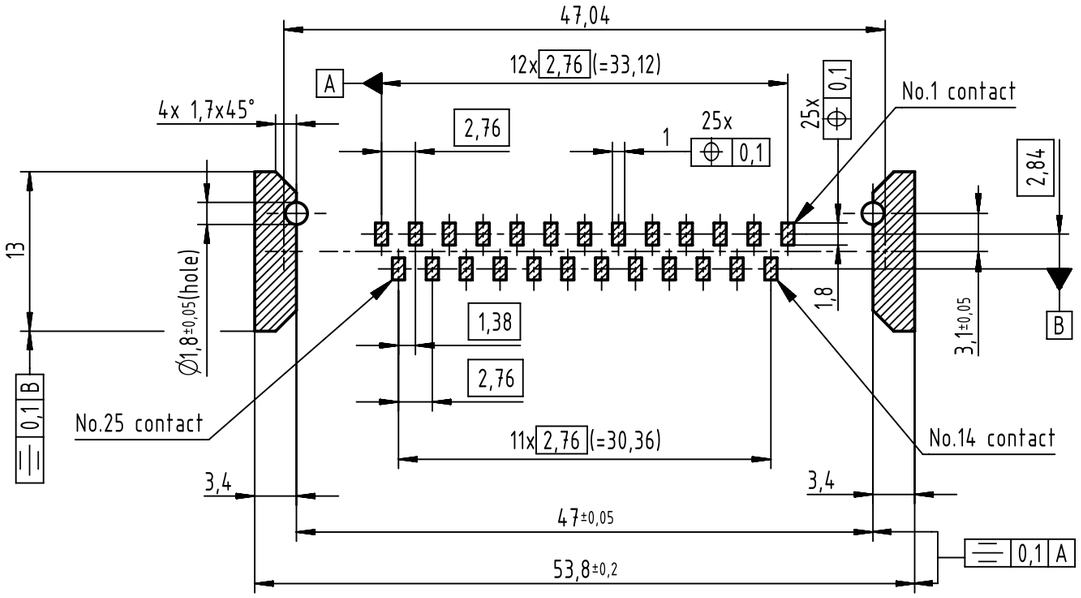

Max. Temperature: 260°C during 10 seconds.
Find further technical information on DS 09550200302.

Part number	PL	Nut	Index designation
0955 315 6612 333	2	4-40 UNC	Black insulator; Samples
0955 315 3612 741	1	4-40 UNC	Black insulator; Reel packaging (140 connectors)
0955 315 6612 741	2	4-40 UNC	Black insulator; Reel packaging (140 connectors)
0955 315 7612 741	3	4-40 UNC	Black insulator; Reel packaging (140 connectors)
0955 315 3611 741	1	M3	Black insulator; Reel packaging (140 connectors)
0955 315 6611 741	2	M3	Black insulator; Reel packaging (140 connectors)
0955 315 7611 741	3	M3	Black insulator; Reel packaging (140 connectors)

All Dimensions in mm
Original Size DIN A3

Scale 2:1
Free size tol.
Ref.
Sub.

All rights reserved

Department EC PD - CN

HARTING Electronics GmbH
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
ZENGD	LUOK	HOFFMANN	2016-08-29	Final Release

Title: D-Sub straight SMT 25-pole female ass with screw nut and pad

Doc-Key / ECM-Nr.: 100236623/UGD/001/C500000107668

Type: TB
Number: 0955315X61X
Rev.: C
Page: 1/1

A3