



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398



DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1878	A	RELEASED	EO	06/05/06	TL	06/19/06	HO	06/19/06






RoHS Compliant

SPECIFICATIONS:

- Current Rating: 3A AC, DC
- Voltage Rating: 250V AC, DC
- Temperature Range: -25°C ~ +85°C
- Contact Resistance: 20 milliohms Max
- Insulation Resistance: 1000 Megohms Min
- Withstanding Voltage: 1500V AC/minute
- Pin Material: (See parts table)
- Material: PBT30%GF, UL94V-0
- Color: Black

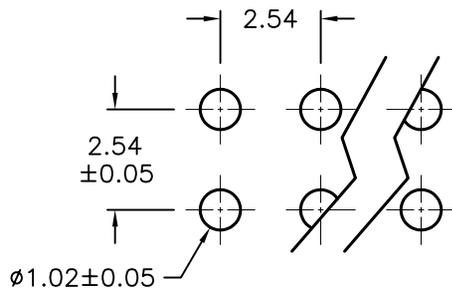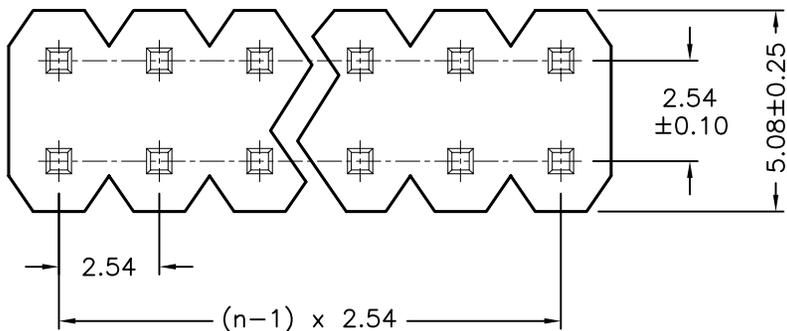

P.C.B LAYOUT

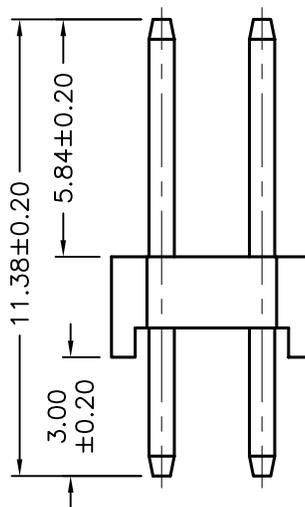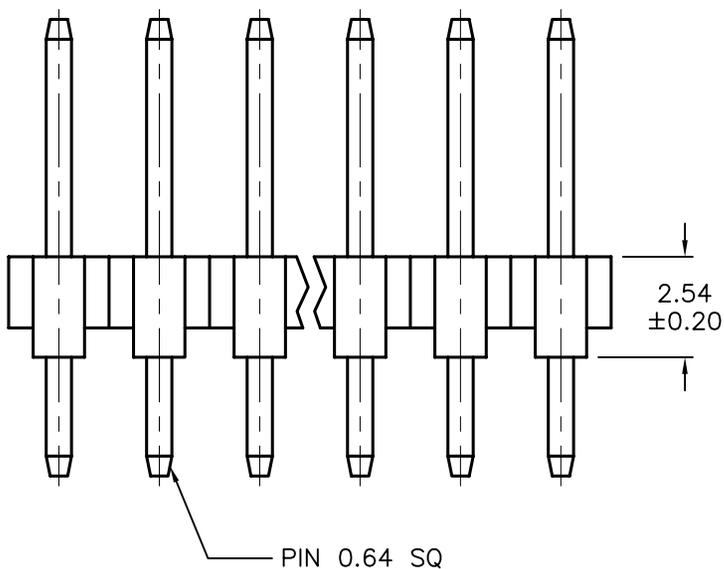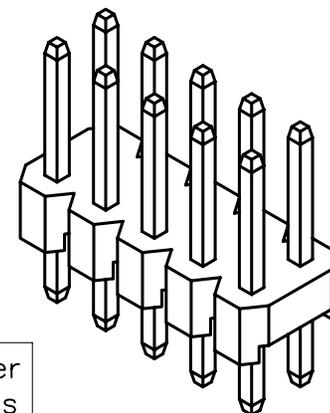

SPC Type Numbers		Number of Pins (n)
Brass, Tin Plated	Brass, Flash Gold Plated	
SPC20498	N/A	2
SPC20499	N/A	4
SPC20500	SPC20493	6
SPC20501	SPC20494	8
SPC20502	SPC20495	10
SPC20503	SPC20496	20
SPC20504	SPC20497	40

PIN 0.64 SQ

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

- .X ±0.25
- .XX ±0.15
- .XXX ±0.05

DRAWN BY:	DATE:
EKLAS ODISH	06/05/06
CHECKED BY:	DATE:
THOMAS LEE	06/19/06
APPROVED BY:	DATE:
HISHAM ODISH	06/19/06

DRAWING TITLE: PCB Pin Headers, 0.100 Inch Spacing, Straight, Double Row			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-770	TA-770.DWG	A
SCALE: NTS	U.O.M.: millimeters	SHEET: 1 OF 1	