




4 POINT OF MEASUREMENT FOR PLATING THICKNESS

5 PART INDICATED IS PACKAGED IN "SINGLE TUBES"

6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

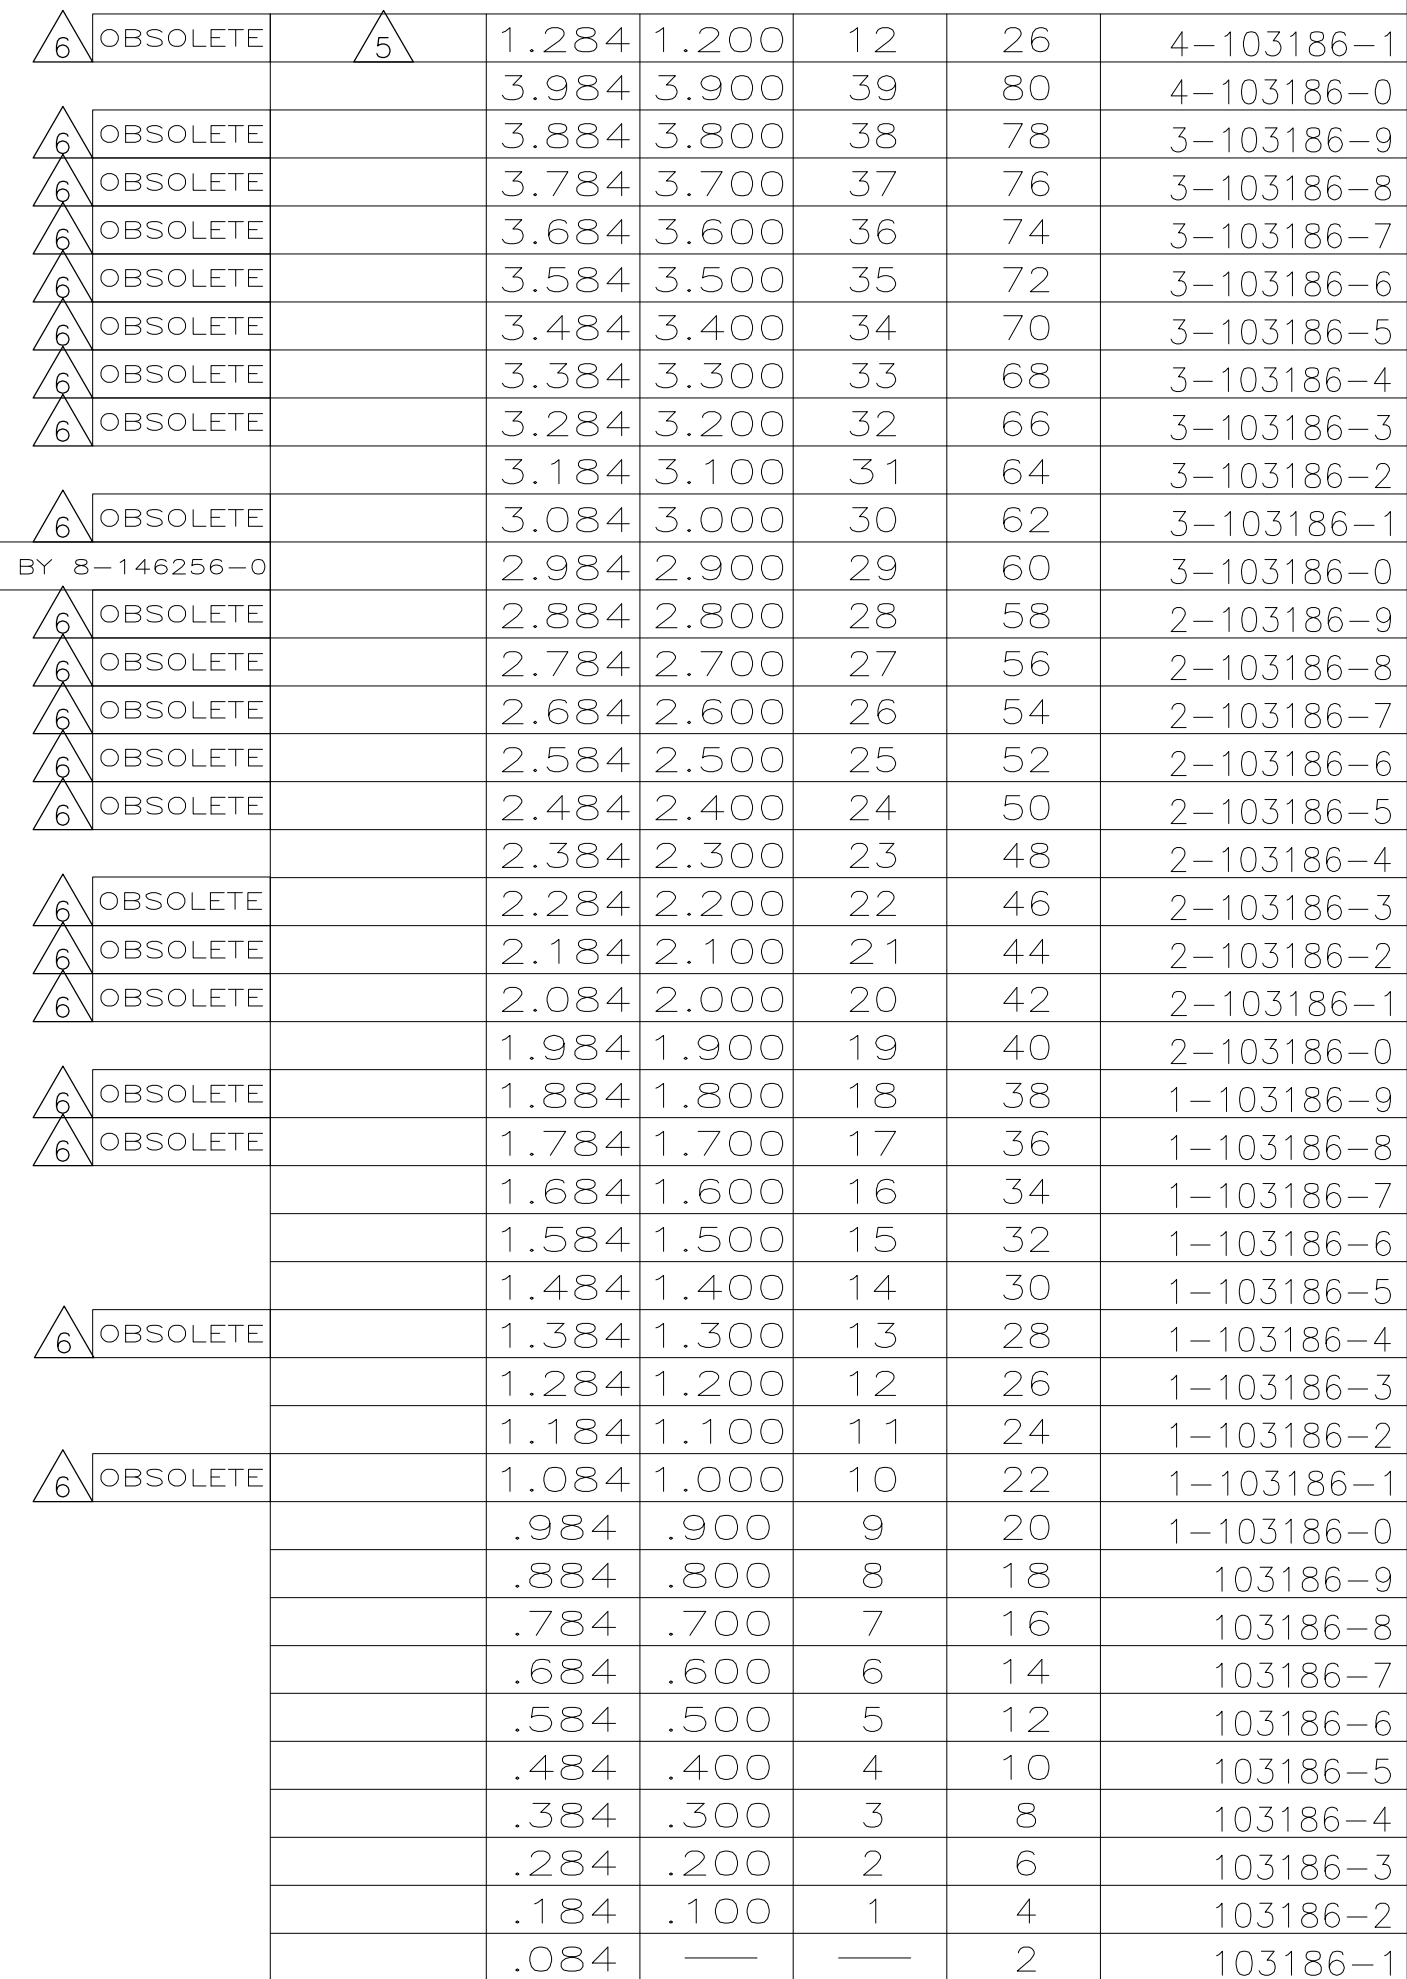

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL		130CT87		 TE Connectivity			
		CHK T. CLARK		200CT87					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. CLARK		NAME			
		0 PLC ± -		PRODUCT SPEC		HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 C, VERTICAL, WITH .025 SQ POSTS			
		1 PLC ± -		—					
		2 PLC ± -.005		APPLICATION SPEC					
		4 PLC ± -		—					
MATERIAL		ANGLES		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
FINISH HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR=BLACK POST: COPPER ALLOY		POST: .000015 GOLD ON CONTACT .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL ALL OVER .000050 NICKEL		WEIGHT		A2 00779 C-103186		—	
CUSTOMER DRAWING						SCALE 4:1		SHEET 1 of 1	REV J