




RECOMMENDED PCB LAYOUT(5:1)  
(PCB THICKNESS:1.6±0.1)

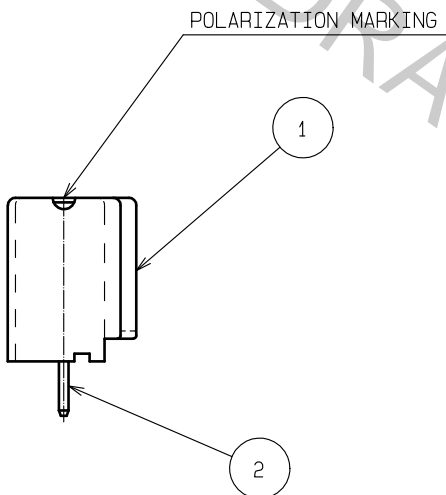

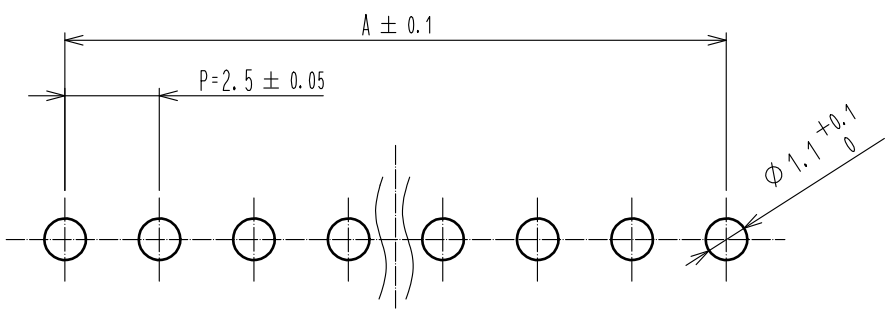



APPLICATION DIAGRAM(3:1)

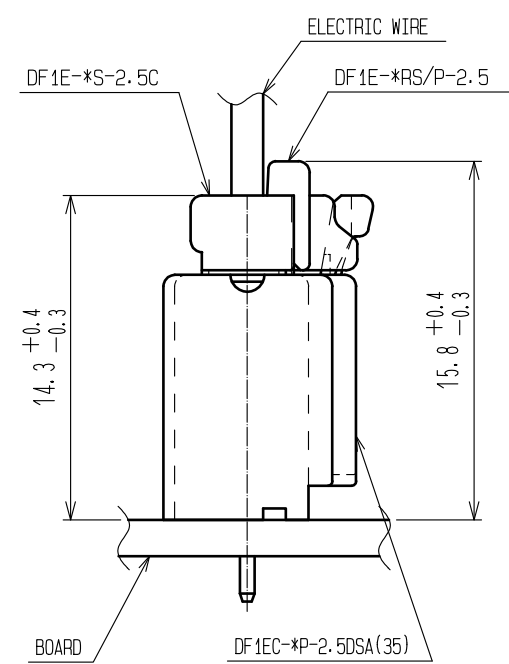

PART No.	CODE No.	NUMBER OF CONTACT	A	B
DF1EC- 2P-2.5DSA(35)	CL541-0867-4-35	2	2.5	7.5
DF1EC- 3P-2.5DSA(35)	CL541-0868-7-35	3	5.0	10.0
DF1EC- 4P-2.5DSA(35)	CL541-0869-0-35	4	7.5	12.5
DF1EC- 5P-2.5DSA(35)	CL541-0870-9-35	5	10.0	15.0
DF1EC- 6P-2.5DSA(35)	CL541-0871-1-35	6	12.5	17.5
DF1EC- 7P-2.5DSA(35)	CL541-0872-4-35	7	15.0	20.0
DF1EC- 8P-2.5DSA(35)	CL541-0873-7-35	8	17.5	22.5
DF1EC- 9P-2.5DSA(35)	CL541-0874-0-35	9	20.0	25.0
DF1EC-10P-2.5DSA(35)	CL541-0875-2-35	10	22.5	27.5
DF1EC-11P-2.5DSA(35)	CL541-0876-5-35	11	25.0	30.0
DF1EC-12P-2.5DSA(35)	CL541-0877-8-35	12	27.5	32.5
DF1EC-13P-2.5DSA(35)	CL541-0878-0-35	13	30.0	35.0
DF1EC-14P-2.5DSA(35)	CL541-0879-3-35	14	32.5	37.5
DF1EC-15P-2.5DSA(35)	CL541-0880-2-35	15	35.0	40.0

- NOTES 1 CONFIGURATION OF DF1EC-2P-2.5DSA(35), DF1EC-3P-2.5DSA(35) AND DF1EC-4P-2.5DSA(35).  
2 2 AND 3 OF CONTACTS MAKE DRAWING FORM (PROJECTION) UNNECESSARY, AND 4 OF CONTACTS CONSIDERED AS ONE PROJECTION IN THE CENTER.  
3. UL(FILE NO.E52653),  
C-UL(FILE NO.E52653) APPROVED PRODUCT.



1			POLYAMIDE		NATURAL (BEIGE)・UL94V-0		2		BRASS		SURFACE:TIN PLATED 1μm min							
											UNDER PLATING:NICKEL PLATED 0.5μm min							
NO.		MATERIAL		FINISH , REMARKS				NO.		MATERIAL		FINISH , REMARKS						
UNITS mm				SCALE 2 : 1				COUNT		DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED :KI. AKIYAMA				15. 05. 23		DRAWING NO.		EDC-161943-35-00						
				CHECKED :TS. FUKUSHIMA				15. 05. 23		PART NO.		DF1EC-*P-2. 5DSA(35)						
				DESIGNED :TS. KUMAZAWA				15. 05. 23		CODE NO.		CL541-						
				DRAWN :MI. SAKIMURA				15. 05. 23				 1 / 1						