




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C180009	2018-08-10	Fisher Wang	update drawing
D	C180514	2018-12-04	Vicky	Update note cable length
E	C180642	2018-12-21	Ruru	Modify Drawing Mark Cable Lenght

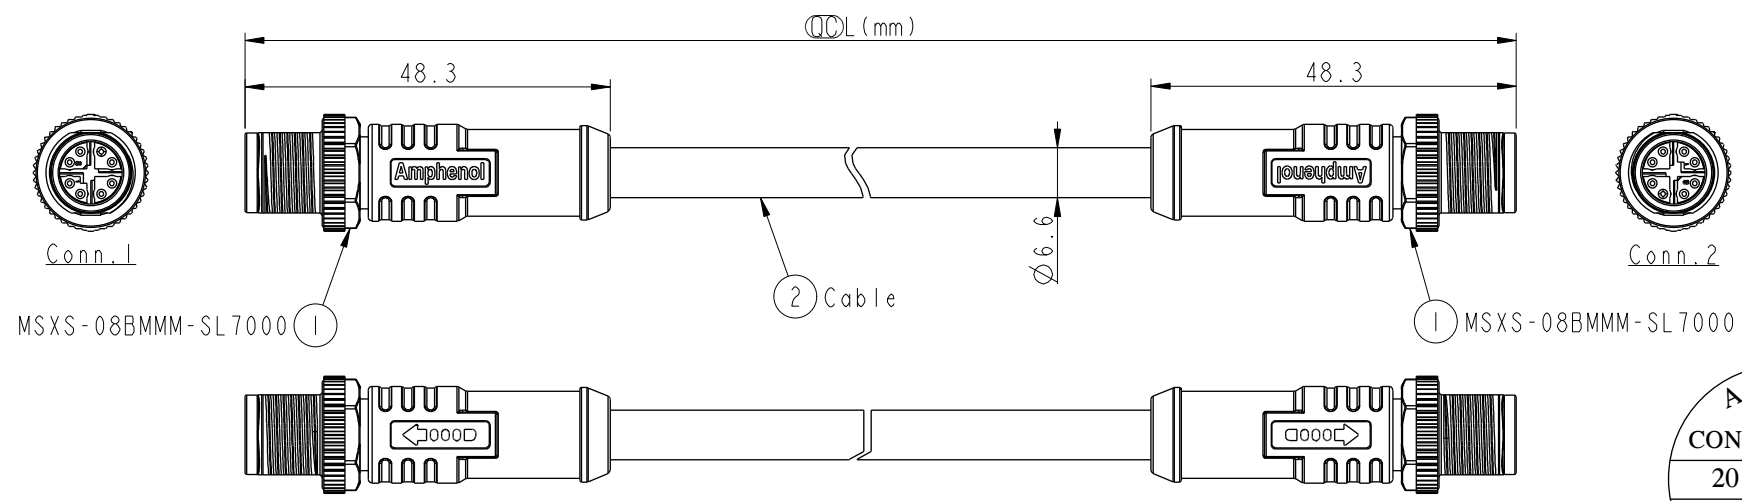

Conn.1&2
Pin Assignment
Front View

Shield	Braid	Shield
8	Blue 藍	8
7	White/Blue 白/藍	7
6	Brown 棕	6
5	White/Brown 白/棕	5
4	Green 綠	4
3	White/Green 白/綠	3
2	Orange 橙	2
1	White/Orange 白/橙	1
Conn.1	Wire Color	Conn.2
Pin Out		

MSXS08ML-SXSML-SGX~~XX~~△E

XXX : 0.5~40 Meters
A05 : 0.5 Meter
001 : 1 Meter
002 : 2 Meters
:
040 : 40 Meters

Cable Length(L):0.5~40Meters

- Note:
- * Important Dimensions To Check
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Screw Nut: Zinc Alloy, Nickel Plated
 - * Shield: Copper Alloy
 - * Outer Mold: PU, Black
 - * Cable: Cat6A, 26AWG*4P+B, LSZH, UV resistant
OD 6.6mm, Green Jacket.
 - * Rated Voltage: 50 V AC, 60 V DC
 - * Rated Current: 0.5A
 - * Cable length Tolerance: 0.5M±20mm
01M±40mm
02M~05M±60mm
06M~10M±100mm
11M~30M±200mm
31M~40M±500mm

UNIT:mm		TITLE
TOLERANCE		M12 X-code Double Ended
±0.5 mm		SCALE 1:1 SIZE A4 SHEET 1 OF 1
	REV. E	WC-REV. A.3 Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Ruru	2018-12-21
MSXS08ML-SXSML-SGX XX	CHECKED BY	DATE
CUSTOMER	Rita	2018-12-21
ALTW	APPROVED BY	DATE
	Max	2018-12-21